



### General description:

- The Digital Condensation Removal Timer is a compact, modular timer valve combination specifically designed for air line condensation removal. This digital timer is compatible with MBS/MCS/MBD series valve size to obtain an optimal system.
- This device easily programmed by two press-keys and a LCD display.

### Notes:

- Multi-voltage from 24 to 240VAC 50 or 60Hz
- Timer is water and dust protected to IP65 when installed properly to a coil and connector with provided M3 screw.
- See manual for all operation options.

### Specification:


Bore size	Valve type	Orifice (mm)
03 ( 1/8 )	<b>MBS-03</b>	1~2.4
06 ( 1/4 )	<b>MBS-06</b>	1~2.4
06 ( 1/4 )	<b>MCS-06</b>	1.6~10
10 ( 3/8 )	<b>MCS-10</b>	1.6~10
15 ( 1/2 )	<b>MCS-15</b>	1.6~10
20 ( 3/4 )	<b>MCS-20</b>	1.6~10
10 ( 3/8 )	<b>MBD-10</b>	15
15 ( 1/2 )	<b>MBD-15</b>	15
20 ( 3/4 )	<b>MBD-20</b>	20
25 ( 1 )	<b>MBD-25</b>	25

Time ranges: Off 0~99.59 mins.  
On 0~59 sec.

**Digital display** Count down ON and OFF times.  
Manual override: Press both keys for 2 secs.

### Order example:

**MBS-03-2-J-3-D-Y-T**

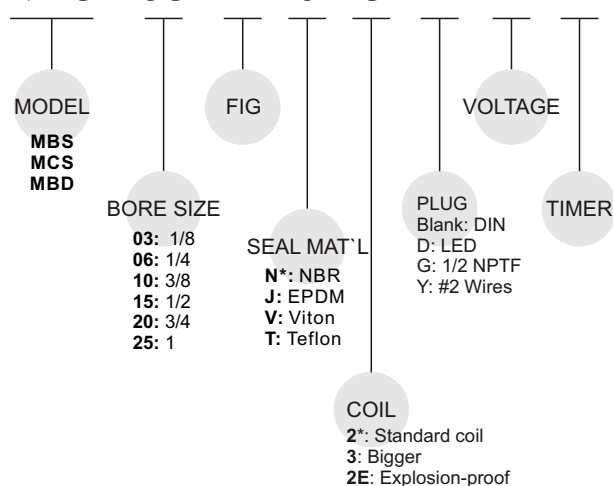

※ : If you select NBR seal coil 2, N 2 can be not shown.

### Time adjustment:

1. Press SET for 2 seconds
2. Press ADJ to adjust ON time
3. Press SET
4. Press ADJ to adjust OFF time
5. Press SET
6. Press ADJ to adjust OFF time minutes
7. Press SET

